




1401 S. Broadway Suite 103A | Joshua, TX 76058

INSTALLATION INSTRUCTIONS

MAVERICK X3 FRONT GRILL

Read Instructions entirely, and view illustrations before beginning.

ITEM	DESCRIPTION	QTY
A	Bottom Grill Panel	1
B	Top Grill Panel	1
C	1/4-20 X 1/2" Allen Bolt	6
D	1/4-20 X 1-1/4" Allen Bolt	2
E	1/4-20 X 3/4" Allen Bolt	2
F	1/4-20 Lock Nut	10
G	Nylon Spacer	2

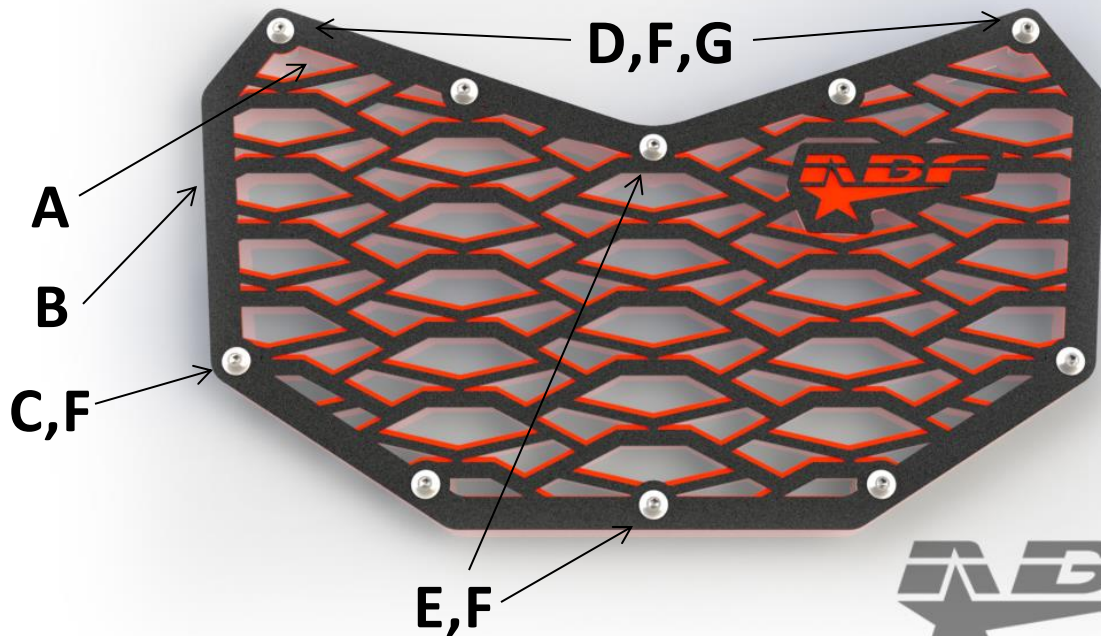

Have questions or comments?



817-366-6110



817-366-6110



INFO@ABFFABRICATION.COM

Thank You for Sharing



FACEBOOK.com/ABFfabrication



LIABILITY STATEMENT

ABF Fabrication accessories are engineered to best fit customer ATV/UTV's in stock condition. cutting, grinding, or modifying any original, or aftermarket, accessories will void any warranty offered by ABF fabrication and is not suggested. ABF Fabrication accessories could have fitment issues with other aftermarket accessories. If Customer has aftermarket accessories on vehicle, contact ABF Fabrication to ensure that all accessories will be compatible.

Customer should be aware that installing suspension accessories, wheels and tires, axles or other components may change the behavior of the vehicle and may require more frequent maintenance and part wear. Operating any off-road vehicle while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this accessories ability to protect customer from severe injury or death. ABF Fabrication urges operators and passengers to always wear a helmet and appropriate riding gear.

By purchasing and installing ABF Fabrication accessories, customer agrees that should any damages occur, ABF Fabrication will not be held responsible for repair fees, replacement parts, and shipping costs. ABF Fabrication, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any accessories purchased from ABF Fabrication. The total liability of ABF Fabrication to customer for all damages, losses, and causes of action, if any, is not to exceed the total purchase price paid for the accessories that gave rise to the claim.

ABF Fabrication will warranty only accessories purchased from ABF Fabrication. Any damages or issues arising with OEM parts or other manufacturers accessories will not be covered by ABF Fabrication. ABF Fabrication accessories are not warranted if accessory was installed incorrectly, misused, or changed in any way.

Removal

1. Remove the Small hood panel just above the grill. Pull directly up to release the rubber barbed mounts. **FIG 1**
2. Remove the front factory grill. ***NOTE:** Some models are attached with screws from the rear, other have no screws. **FIG 1**

Installation

1. Position the grill and secure at the top corners with 1/4" x 1-1/4" Allen Bolts (D) and Lock Nuts (F). The Nylon Spacer (G) will install between the back side of the grill and the front plastic. This will properly space the corners of the grill. **FIG 2 DO NOT TIGHTEN**
2. Finish securing the grill using 1/4" x 3/4" Allen Bolts (E) and Lock Nuts (F) These are used in the center two mounting holes. **See Page 1 Diagram**
3. Make sure the grill is positioned how you like it, and then tighten all mounting hardware. **DO NOT OVERTIGHTEN....IT IS JUST PLASTIC. FIG 3**
4. Reinstall the small front hood, and take a step back to admire your new grill and take photos!



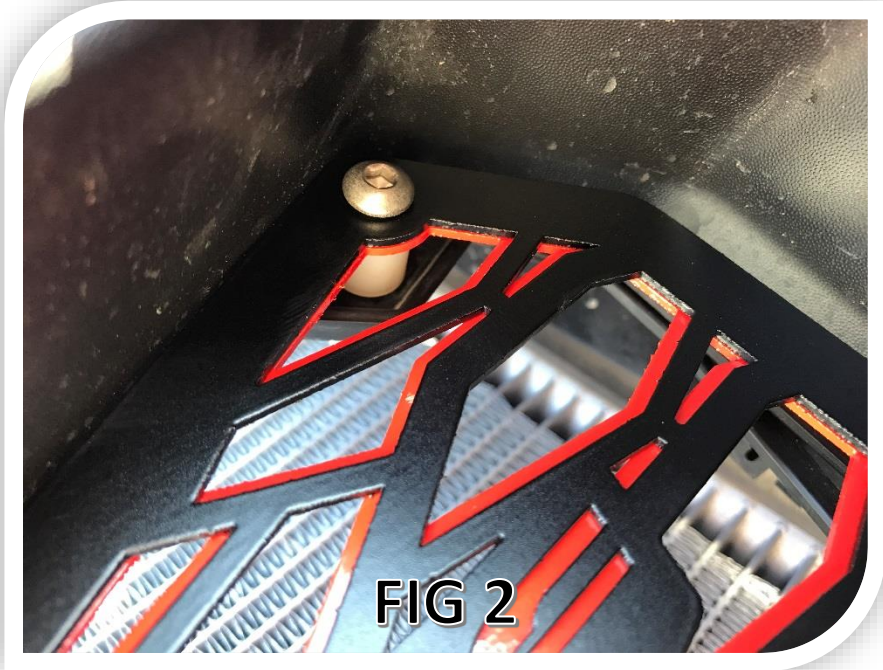


FIG 2



FIG 3